


TOPAS[®] Elastomer E-140

Cyclic Olefin Copolymer

Processing Conditions for Extrusion

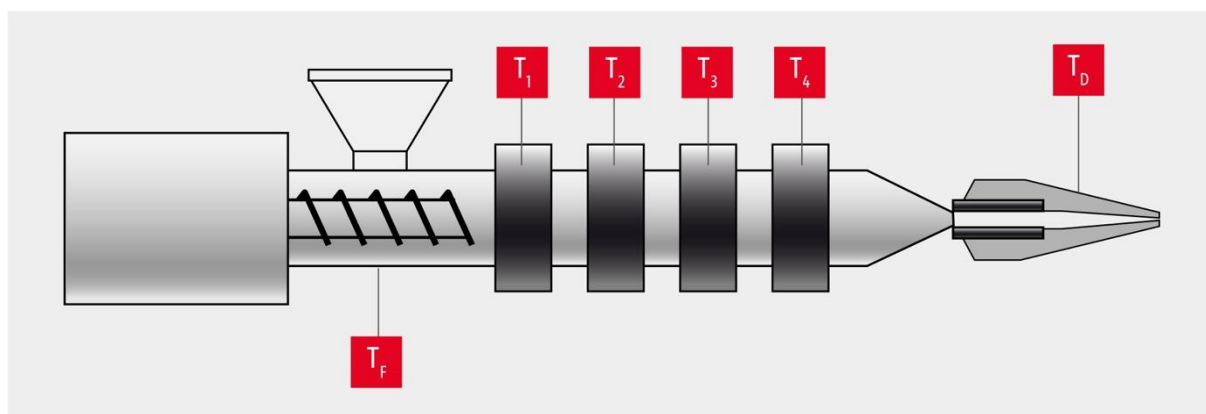

Processing Temperatures

T_F	T_1	T_2	T_3	T_4	T_D
20-60 °C	210-220 °C	230-240 °C	230-240 °C	230-240 °C	230-240 °C
68-140 °F	410-428 °F	446-464 °F	446-464 °F	446-464 °F	446-464 °F

Head Pressure	$P_{melt} > 140 \text{ bar} / 2000 \text{ psi}$ Fine screen packs as needed
Screw Speed	$n_{screw} > 50\% \text{ nominal}$
Screw Design	Multi-purpose or barrier screw w/ mixing section Screw diameter $> 60 \text{ mm} / 2.5 \text{ inch}$ Preferred L/D ratio $\geq 28:1$ where available

Note

This grade can be extruded on a variety of commercial cast and blown film lines as a monolayer, in blends or as a discrete layer in coextrusion. These recommendations are preferred start-up conditions and must be optimized on the specific extrusion line. Please contact us for further process recommendations. See also our processing guide for polyolefin blends if such blends are planned.

IMPORTANT: This publication contains general advice for processing of our products. It indicates typical processing conditions, and is not intended to cover individual cases. The properties of our products may change as a result of processing conditions or the inclusion of additives. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and to entrust the handling of such material to adequately trained personnel only. Please refer to the appropriate Safety Data Sheets before attempting to process our products.

TOPAS Advanced Polymers GmbH | Am Prime Parc 9 | 65479 Raunheim | Germany
+49 (0) 1805-1-86727 (EU) | +1 248 479 8928 (USA) | +81 3 6711 8615 (Asia/Pacific) | www.topas.com